



**SPARCO HARNESS BAR
2003-2004 MITSUBISHI LANCER EVOLUTION
PART # 30018**

DISCLAIMER

Motorsports are dangerous. No warranty or representation is made as to product's ability to protect the user from any injury or death; the user assumes that risk. Sparco Motor Sports' products are legal in all 50 states for use on racing vehicles which may never be used on a highway. Not applicable or intended for street or highway use.

INSTALLATION


1. Assemble the harness bar support rods as shown below using the provided heim joints and nuts. Leave at least $\frac{1}{4}$ " of thread showing on each heim joint to allow for adjustment during installation. Do not fully tighten the nuts at this time. **NOTE: The smaller heim joint has reverse thread.**




2. On both sides of the vehicle's interior, remove the plastic upper seat belt bolt cover and remove the upper bolt as shown here. The factory retaining washer needs to be removed so the factory bolt can be completely removed from the upper mount. **NOTE: The factory retaining washer will be re-used in the installation process.**



3. Assemble the upper mounting hardware as shown in this picture and bolt the assembly into vehicle. Do not fully tighten the bolt at this time.

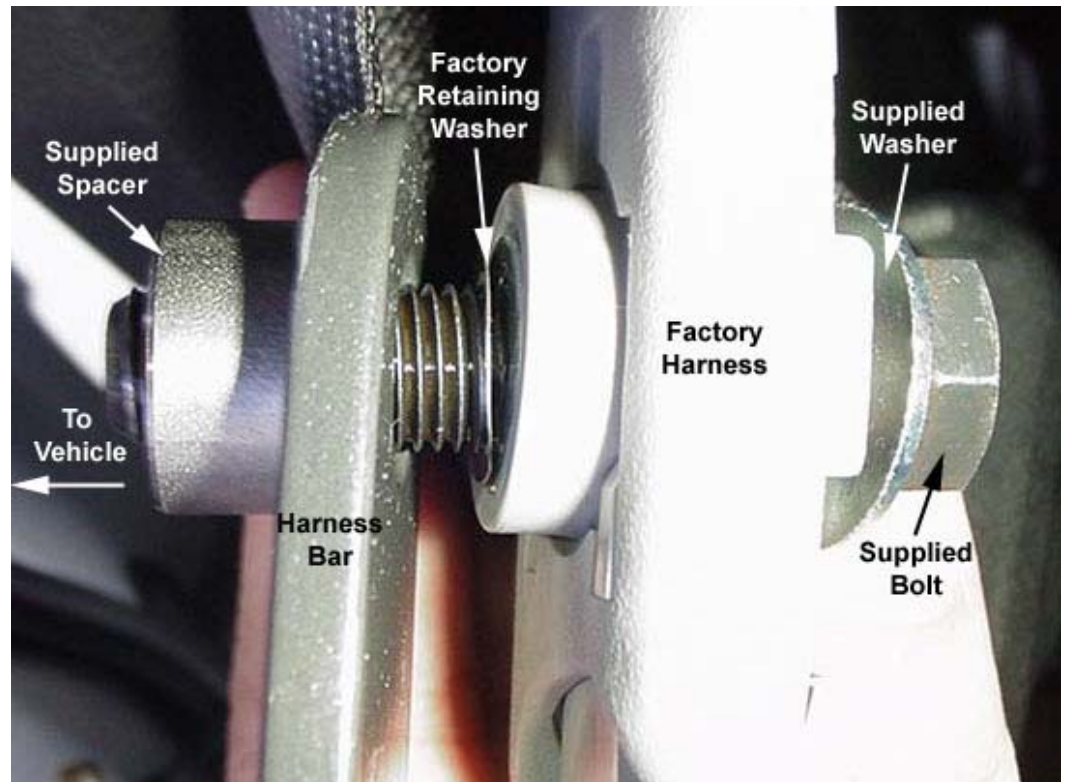

4. Remove the factory lower harness bolt cover (rubber) and remove the bolt from the vehicle. Remove the factory retaining washer and remove the bolt from the harness mount. Assemble the lower hardware as shown in this picture. Bolt assembly into the vehicle. Do not fully tighten bolt at this time.

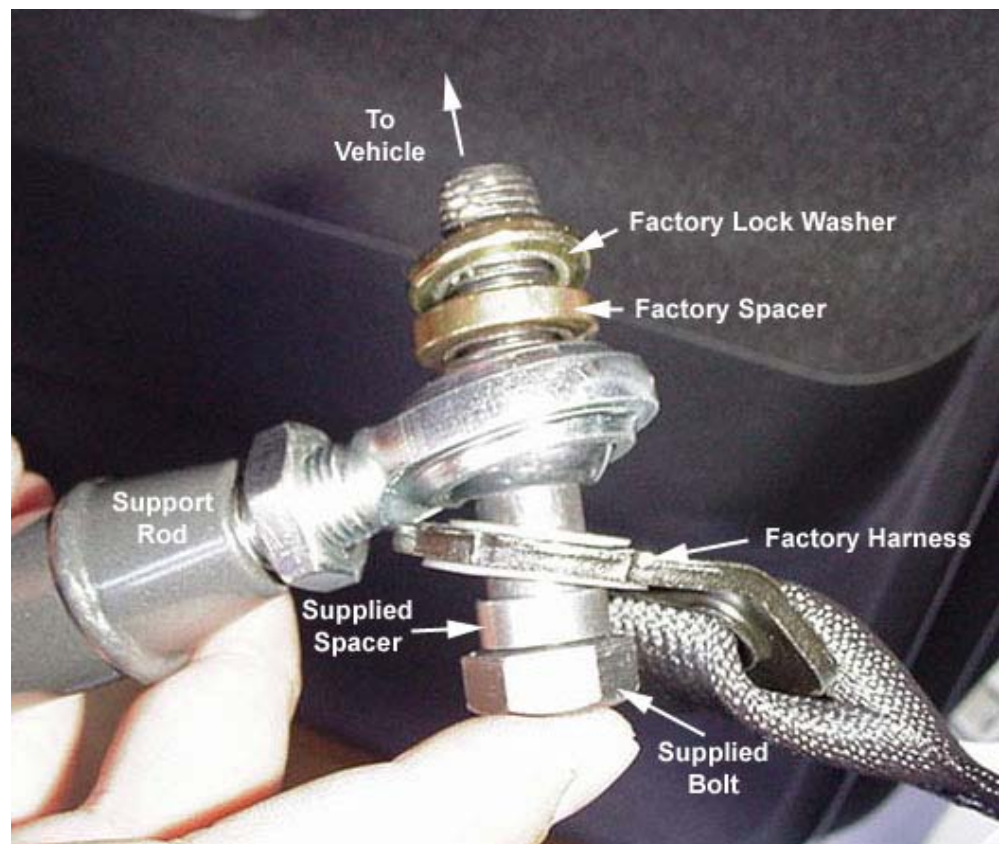

5. Connect the upper support rod mounts to the harness bar using the supplied bolt, washer and nut.
6. Check for proper installation and adjust as necessary. Tighten all bolts and nuts. Replace the lower rubber cover and upper plastic cover. **NOTE: The inside of the upper cover needs to be cleared to allow for proper fit.** The finished installation should look like this:

